



- ! Please be careful when handling the parts.
- ! It is not our responsibility for any damage caused in use.
- Warning: Please make sure there is NO MicroSD inserted before assembling.


## Step 1: Install safe shutdown script




Safe Shutdown Scripts:  
<https://github.com/RetroFlag/retroflag-picase>

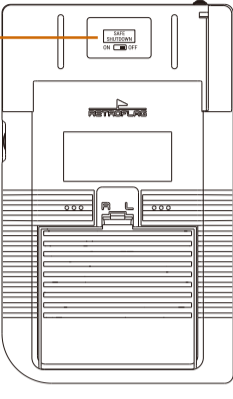


2

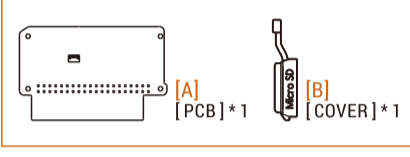


take out

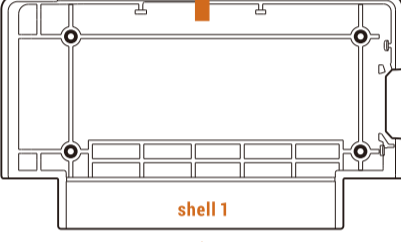


part

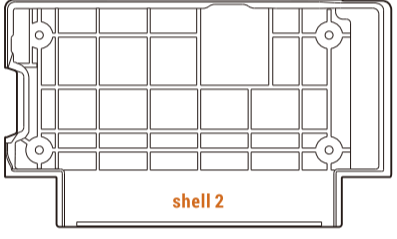

5

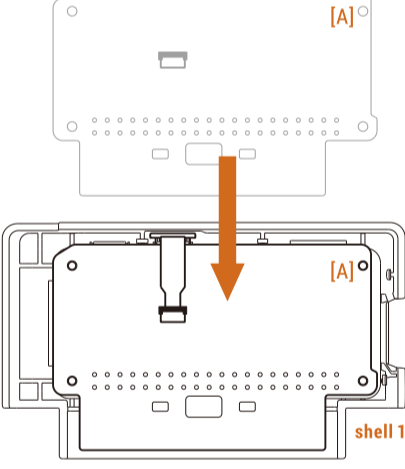


6

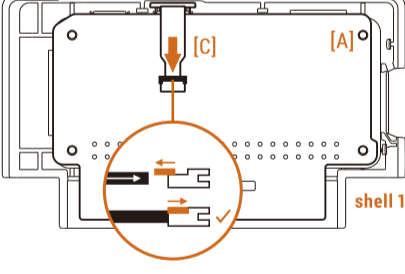

9



10

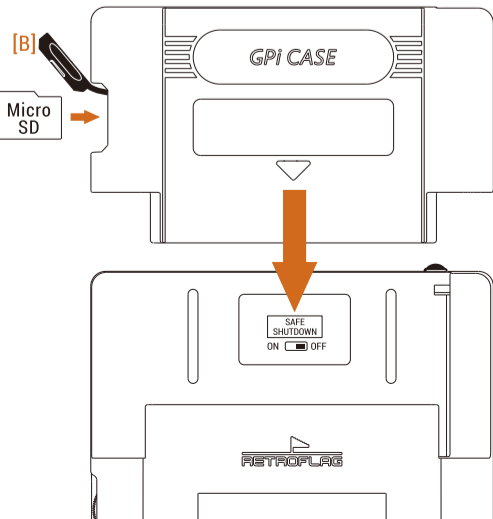


## Step 2: Install GPI Case patch


Download from [support.retroflag.com](http://support.retroflag.com)

GPI Case patch → Micro SD


## Step 3: Assemble

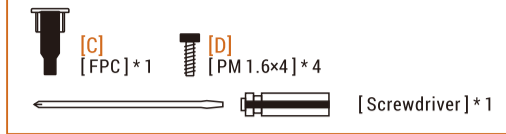


1

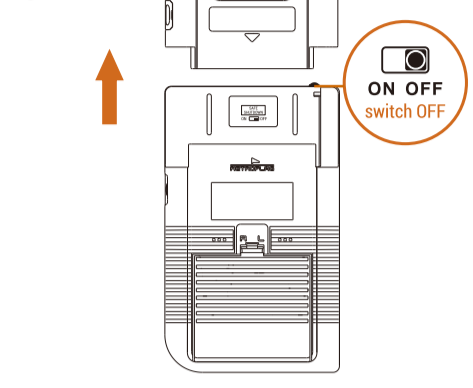


3

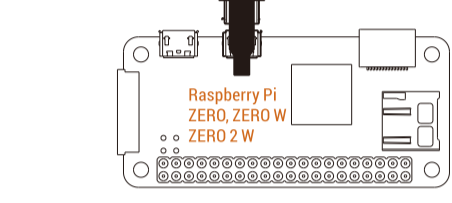


4

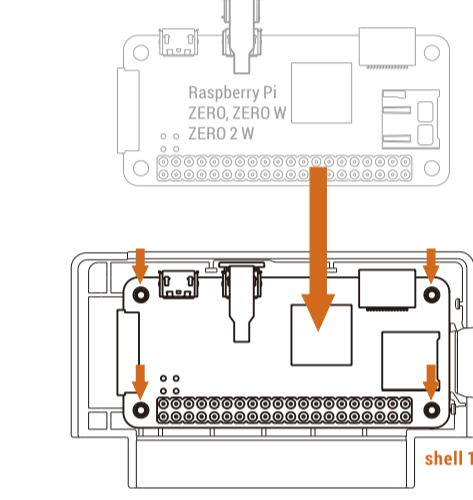


7

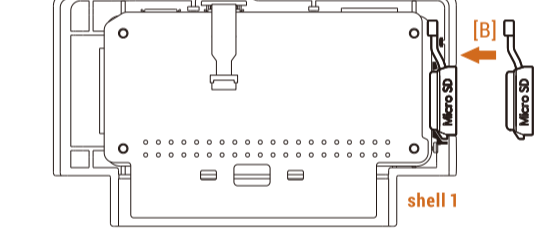

8

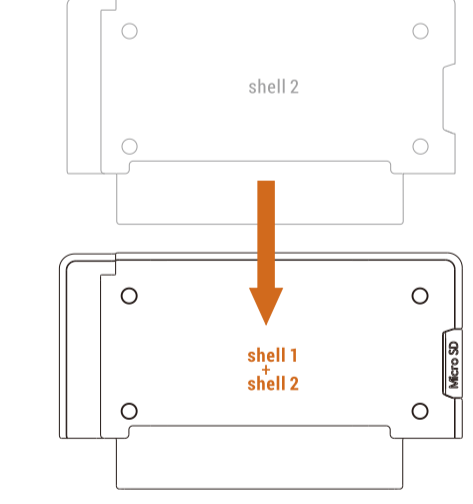

RETROFLAG GPI CASE 2W

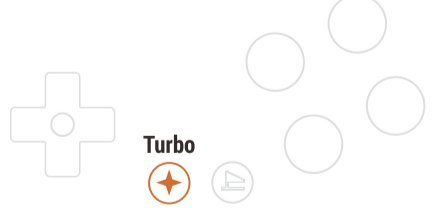

- 1- Turbo: Press and hold TURBO button, then press A/B/X/Y/L/R button.
- 2- Auto-Turbo: Press and hold TURBO button, then double press A/B/X/Y/L/R button; Pause/Restart Auto-Turbo function via press the button you set.
- 3- Swap buttons: Press and hold the two buttons you would like to swap, then press TURBO button.
- 4- Slow motion: You can set Auto-Turbo functions on START button to active slow motion.
- 5- Deactivate Turbo/ Auto-Turbo/ Swap functions: Press and hold TURBO button, then press the activated button.

\* Can't set Turbo and Swap functions on one button at the same time.