


Power save mode

- Press power save button will enter power save mode.
- No operation in 15mins will enter power save mode.
- Press power save button will recover system in power save mode.
- In power save mode, system will auto shut down in 20mins (safe shutdown script necessary), press power save button can power on system.

Note: If running out of battery data might be lost in power save mode without safe shutdown script installed.

Install safe shutdown script

RASPBERRY PI COMPUTE MODULE 4



Safe Shutdown Scripts:


<https://github.com/RetroFlag/GPiCase2-Script>

Install GPi Case 2 patch


Download from support.retroflag.com

GPi Case 2 patch → Micro SD



②



③



⑤

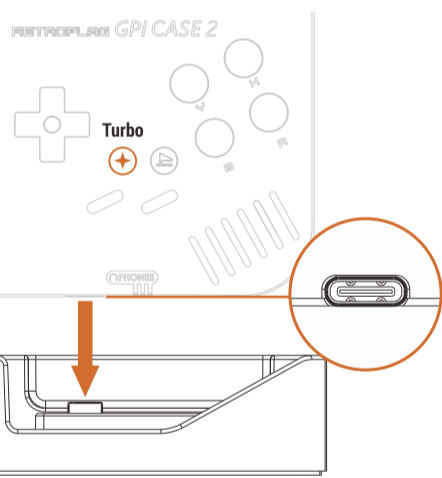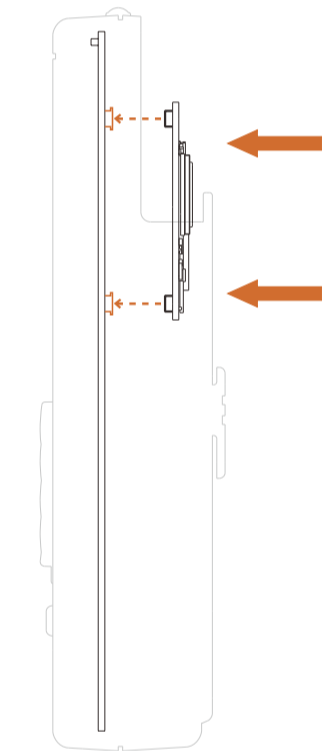


1- Turbo: Press and hold TURBO button, then press A/B/X/Y/L/R button;



2- Auto-Turbo: Press and hold TURBO button, then double press A/B/X/Y/L/R button; Pause/Restart Auto-Turbo function via press the button you set.

3- Swap buttons: Press and hold the two buttons you would like to swap, then press TURBO button;


①



④

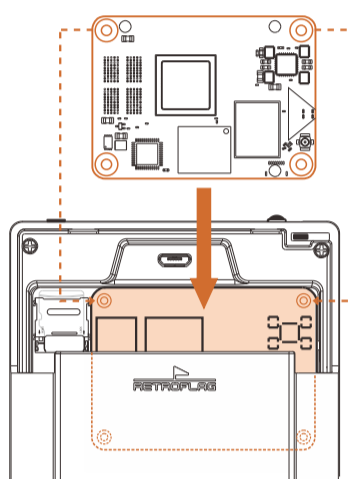

⑥

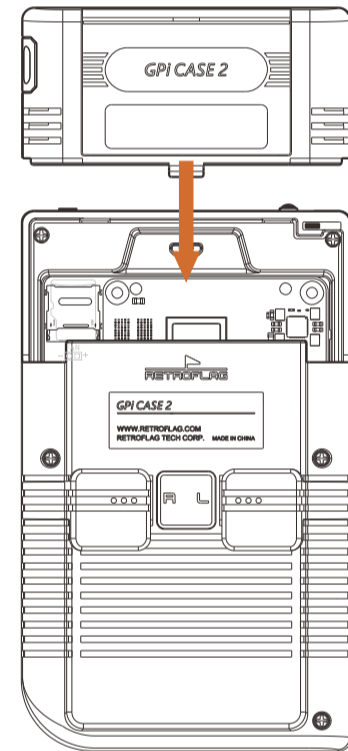


4- Slow motion: You can set Auto-Turbo functions on START button to active slow motion.

5- Deactivate Turbo/ Auto-Turbo/ Swap functions: Press and hold TURBO button, then press the activated button.


* Can't set Turbo and Swap functions on one button at the same time.

⑦

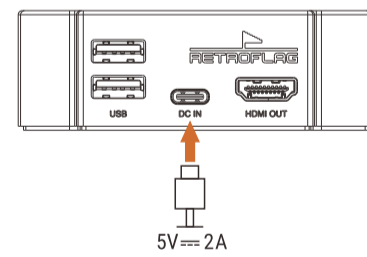

RETROFLAG

RETROFLAG GPi CASE 2

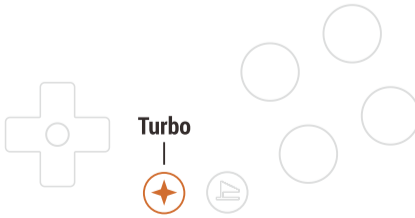

1- Turbo: Press and hold TURBO button, then press A/B/X/Y/L/R button;

2- Auto-Turbo: Press and hold TURBO button, then double press A/B/X/Y/L/R button; Pause/Restart Auto-Turbo function via press the button you set.

3- Swap buttons: Press and hold the two buttons you would like to swap, then press TURBO button;

4- Slow motion: You can set Auto-Turbo functions on START button to active slow motion.

5- Deactivate Turbo/ Auto-Turbo/ Swap functions: Press and hold TURBO button, then press the activated button.

* Can't set Turbo and Swap functions on one button at the same time.